



10744/9

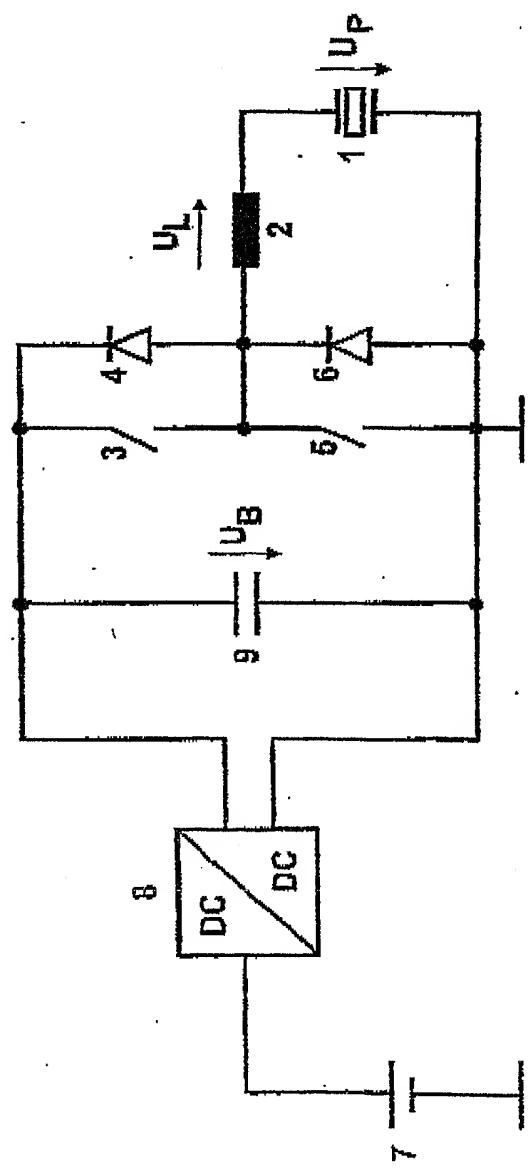


卷二


10744/9

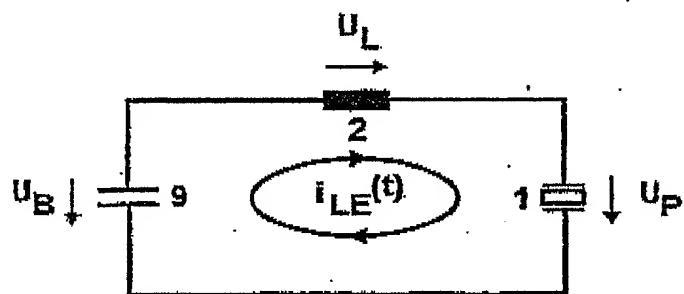


**FIG. 2**

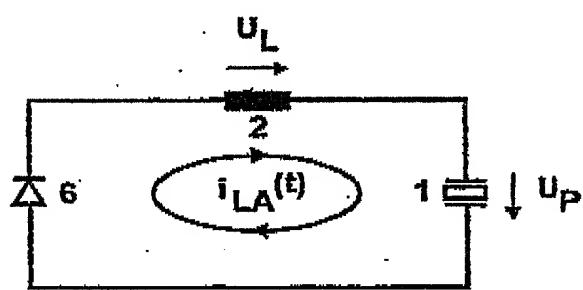

**FIG. 3**

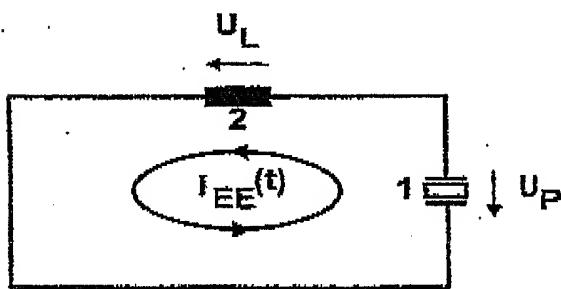

**FIG. 4**

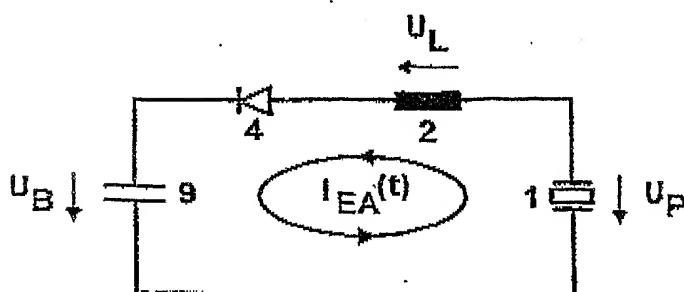

**FIG. 5**

10744/9


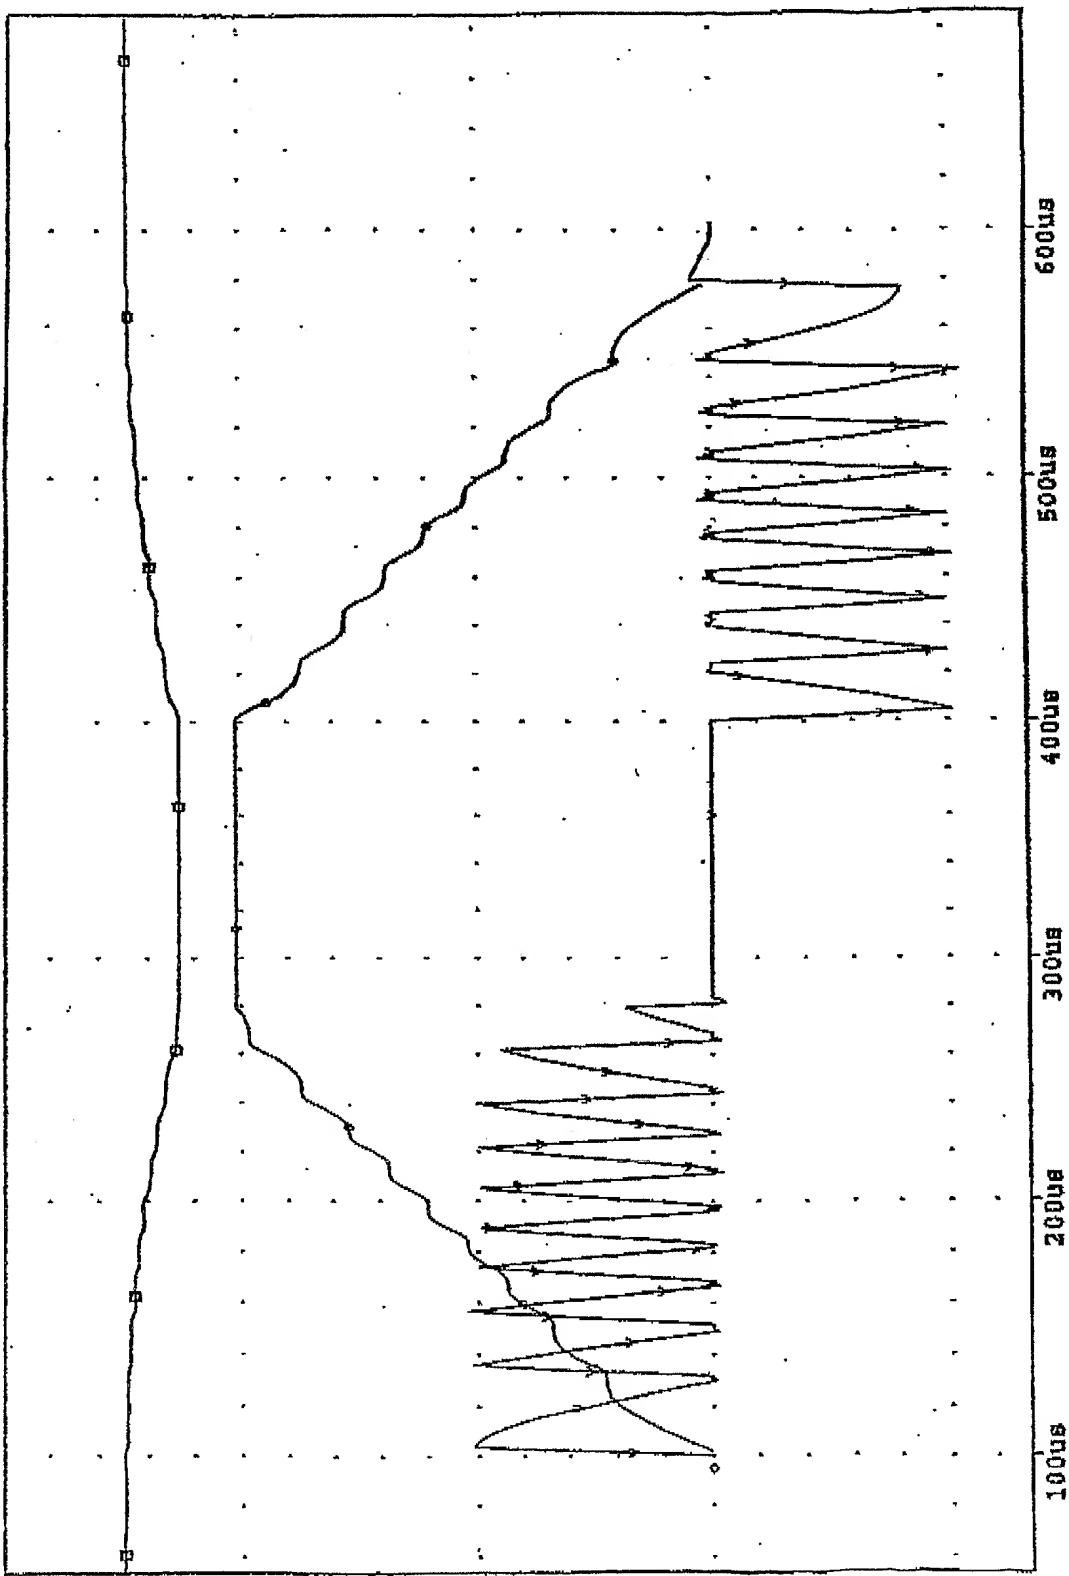



FIG. 6

10744/9

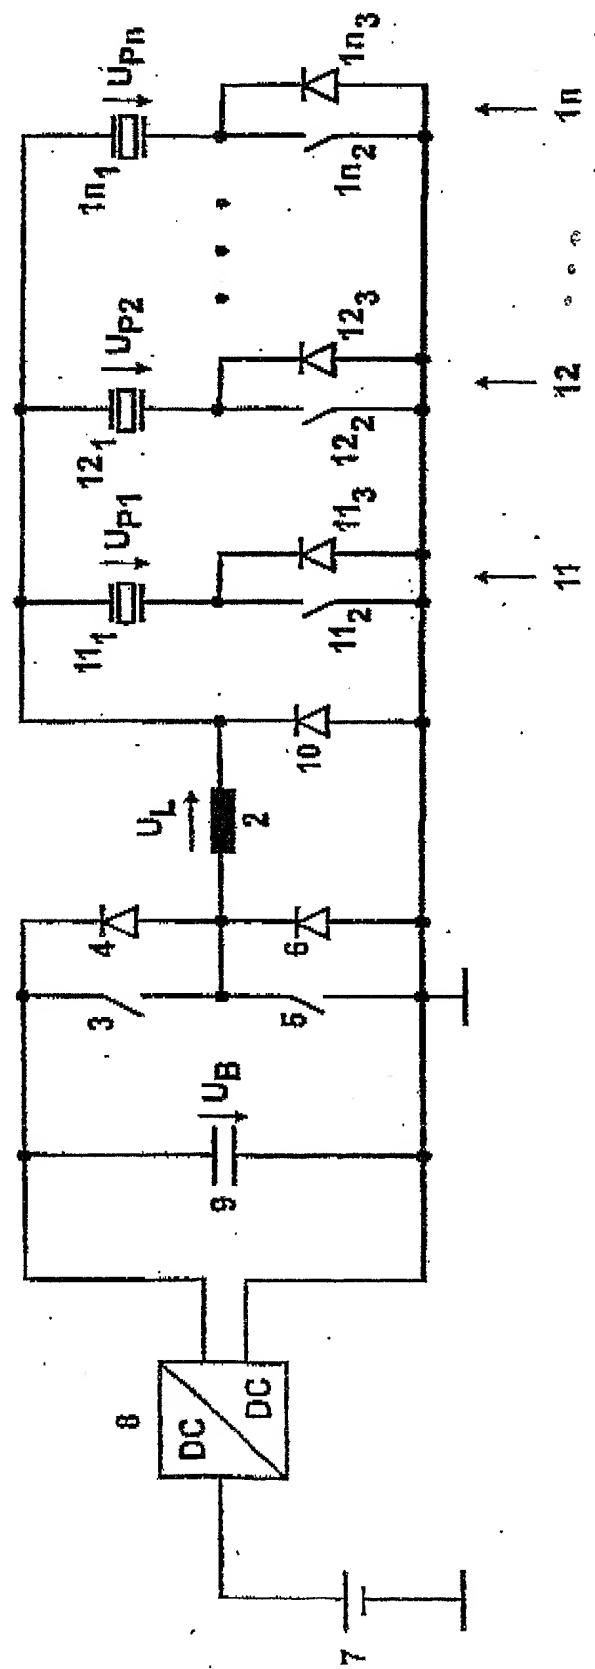

216

10744/9

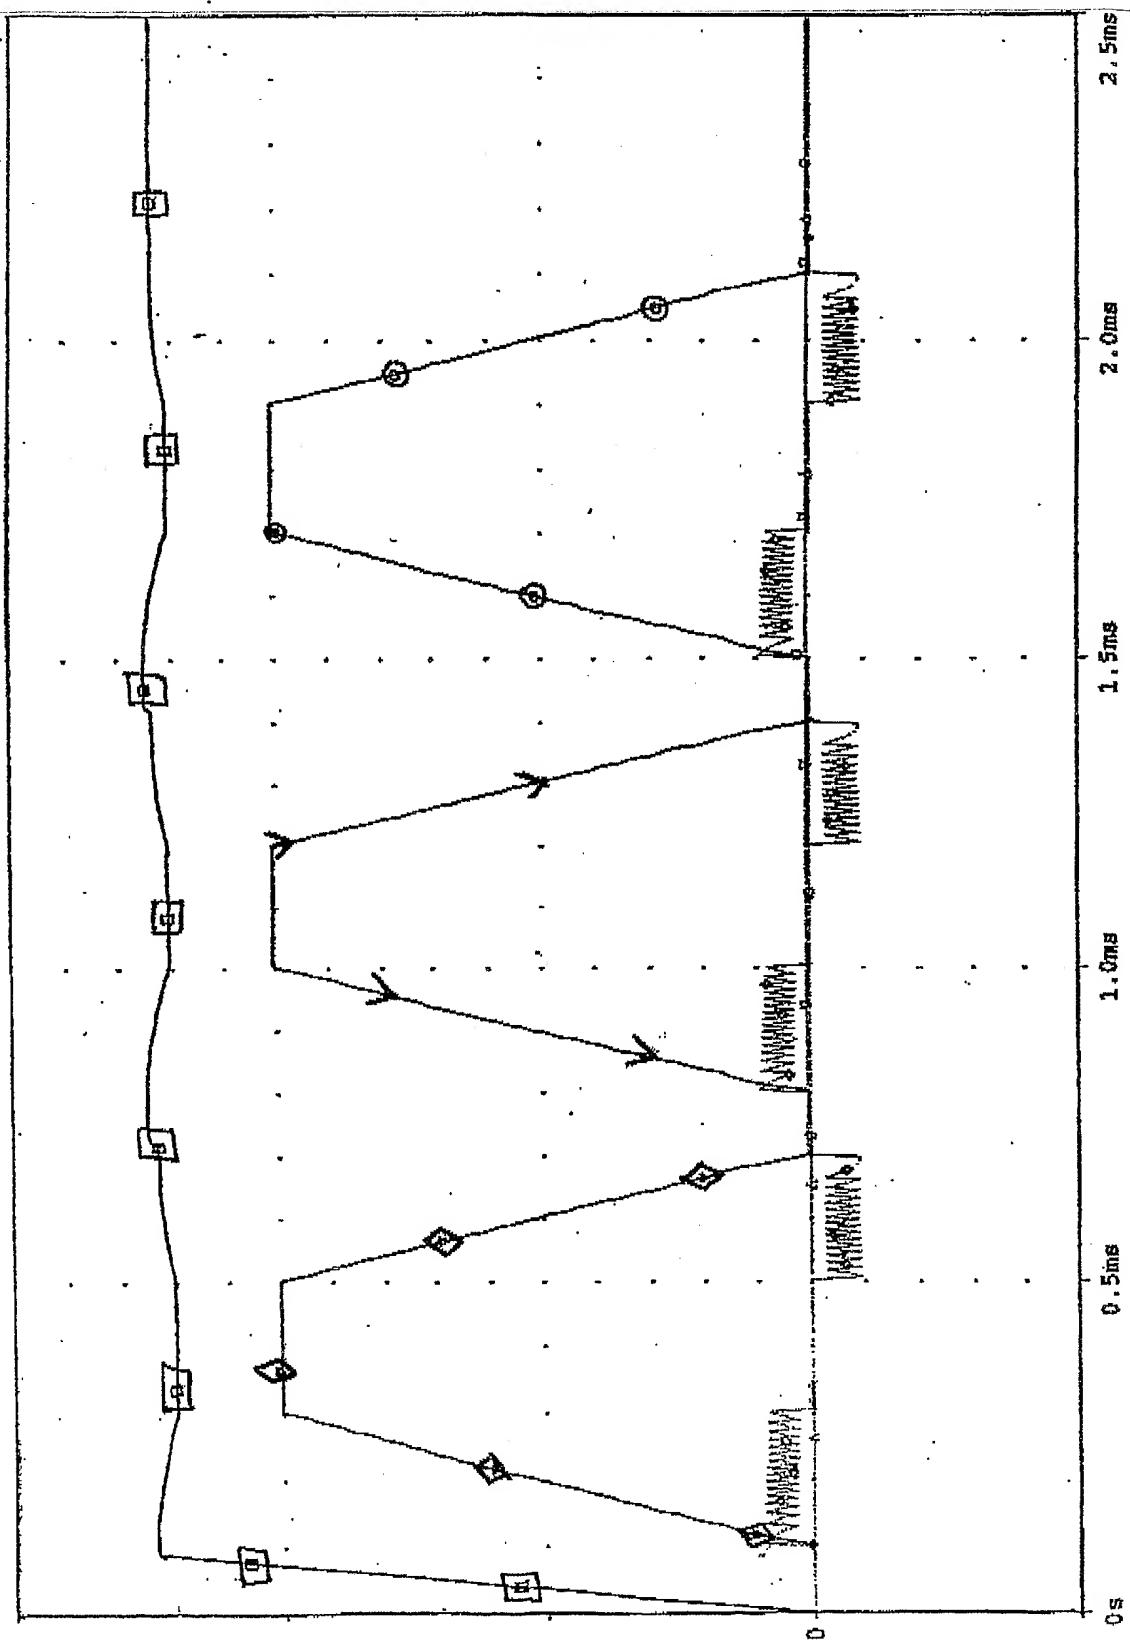

10744/9

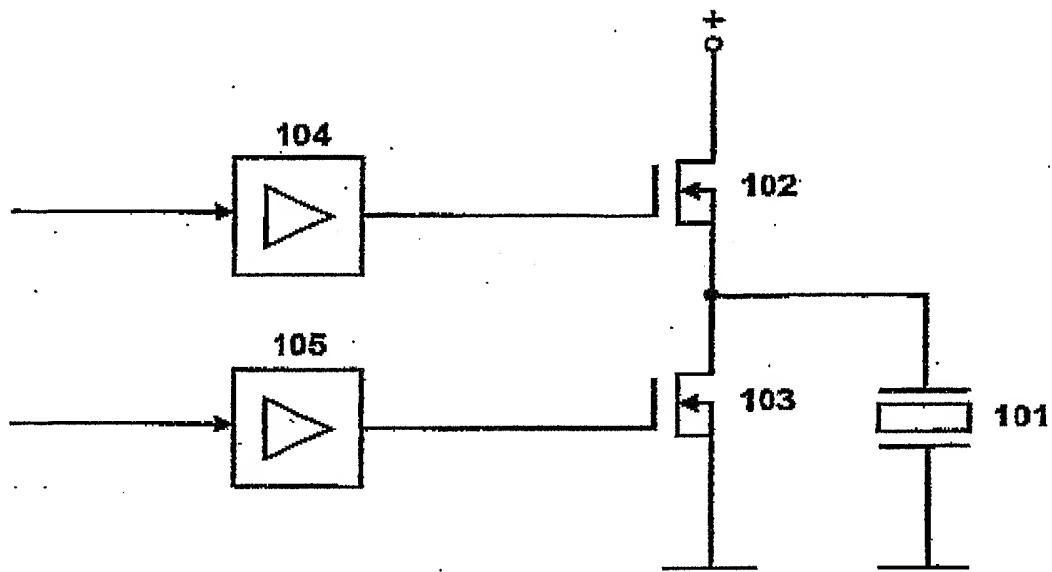


FIG. 9

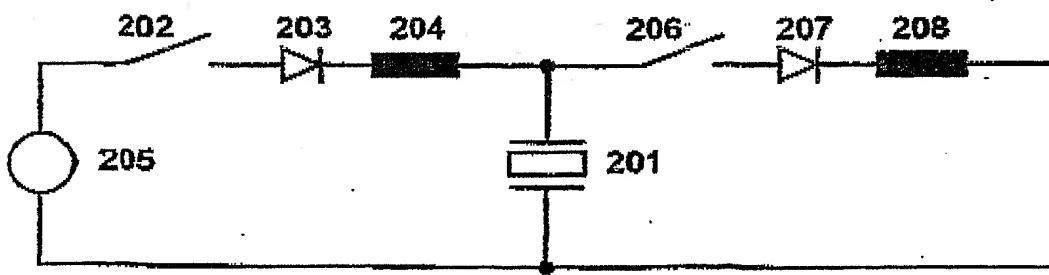


FIG. 10

240

**FIG. 11****"Normal-control" in the connector**

200

160

120

80

40

Switch 3  
in closed  
position  
according to  
FIG. 1

0

-40

**Voltage****Current**

Switch 3 in open position  
according to FIG. 1


0s

50us

100us

150us

10744/9

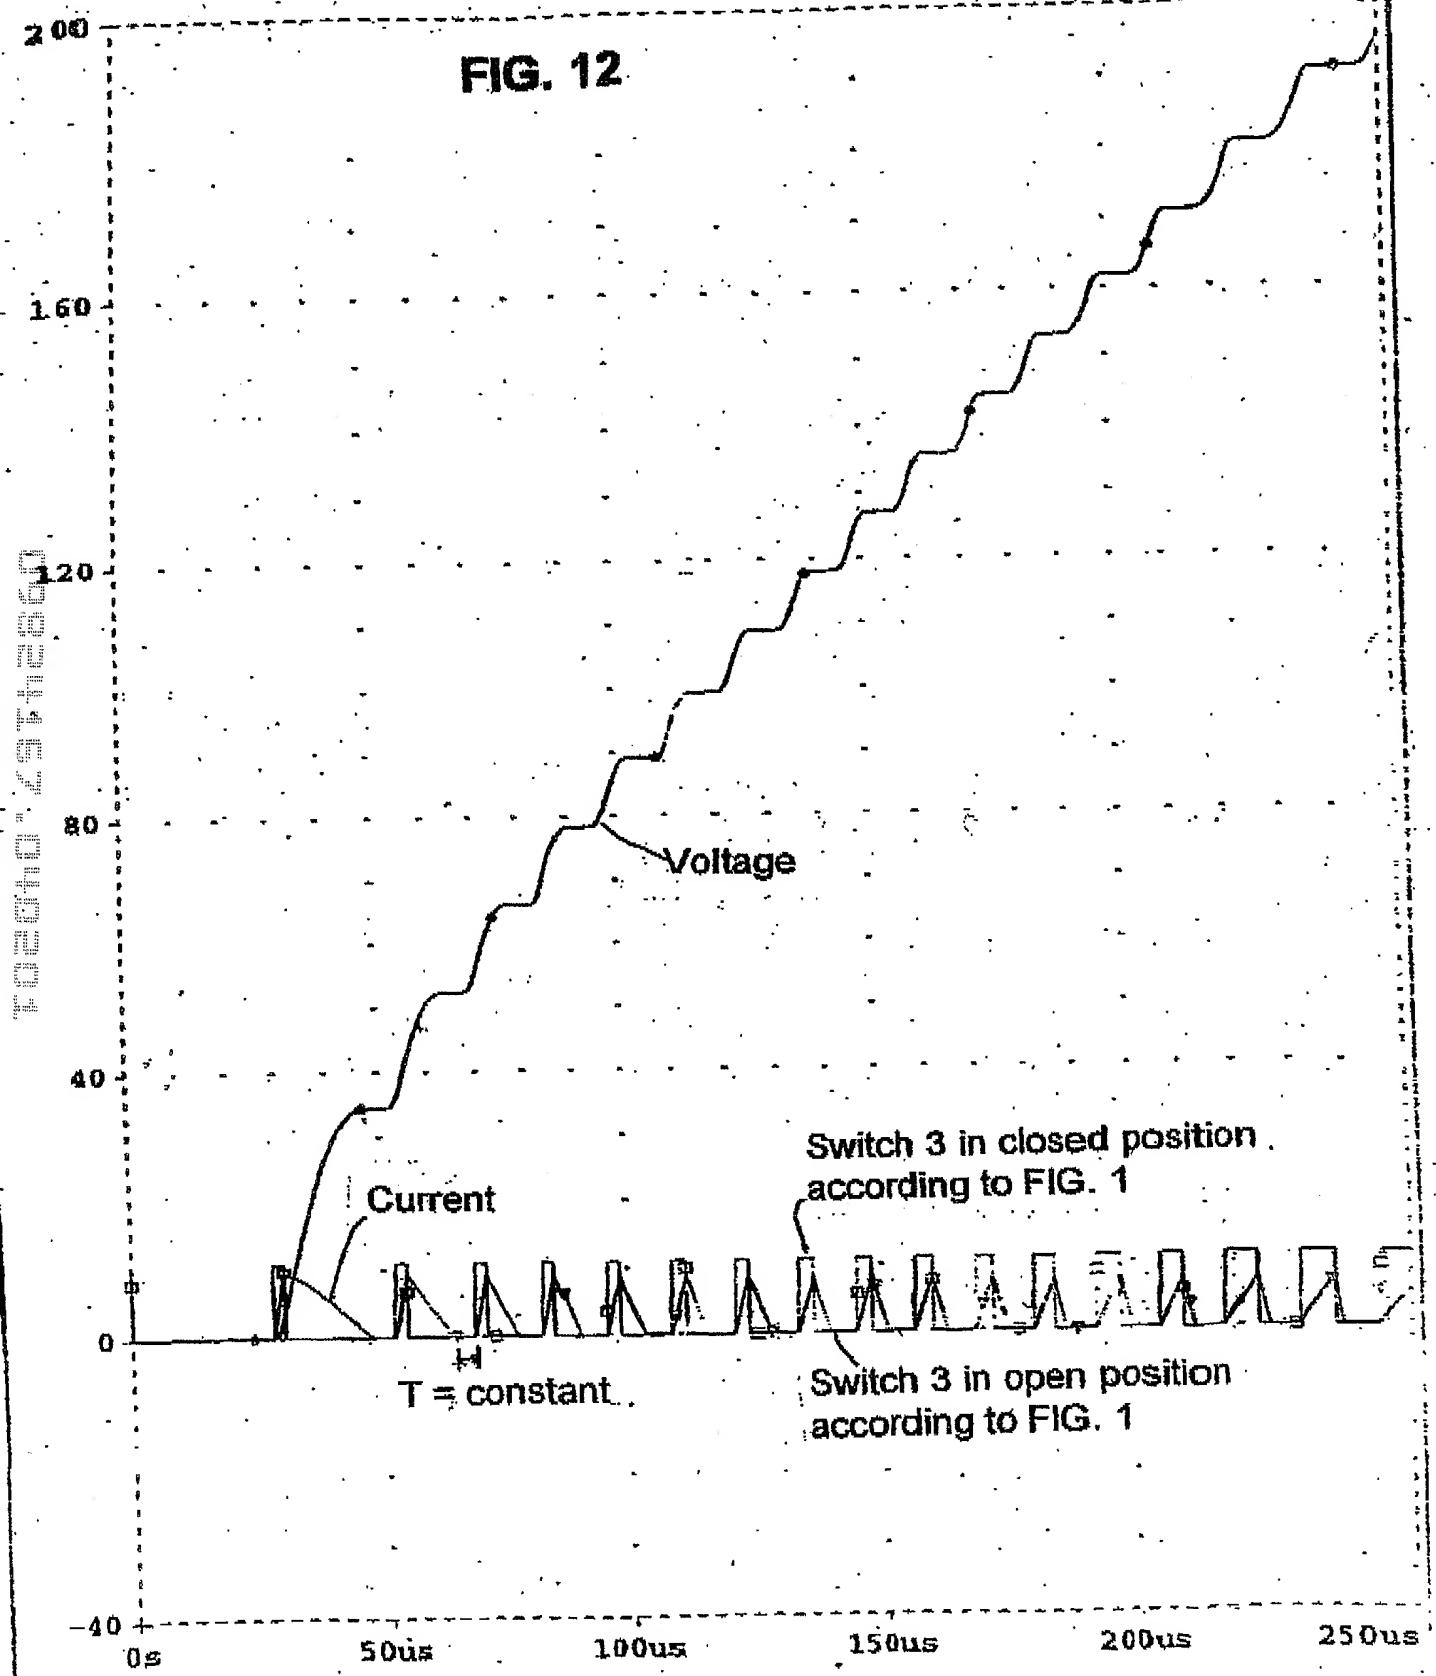

10744/9

**FIG. 13**

160

140

120

100

80

60

40

20

0

Constant control frequency (50 kHz)

Voltage

Current

20  $\mu$ s

Switch 3 in closed position

T =  
constant

Switch 3 in open position

-20

0s

50us

100us

150us

200us

250us

10744/9

200

160

120

80

40

0

-40

FIG. 14

Voltage

Current

constant break times

Switch 3 turned on

Switch 3 turned off

T =  
constant

50us

100us

150us

0s

10744/9

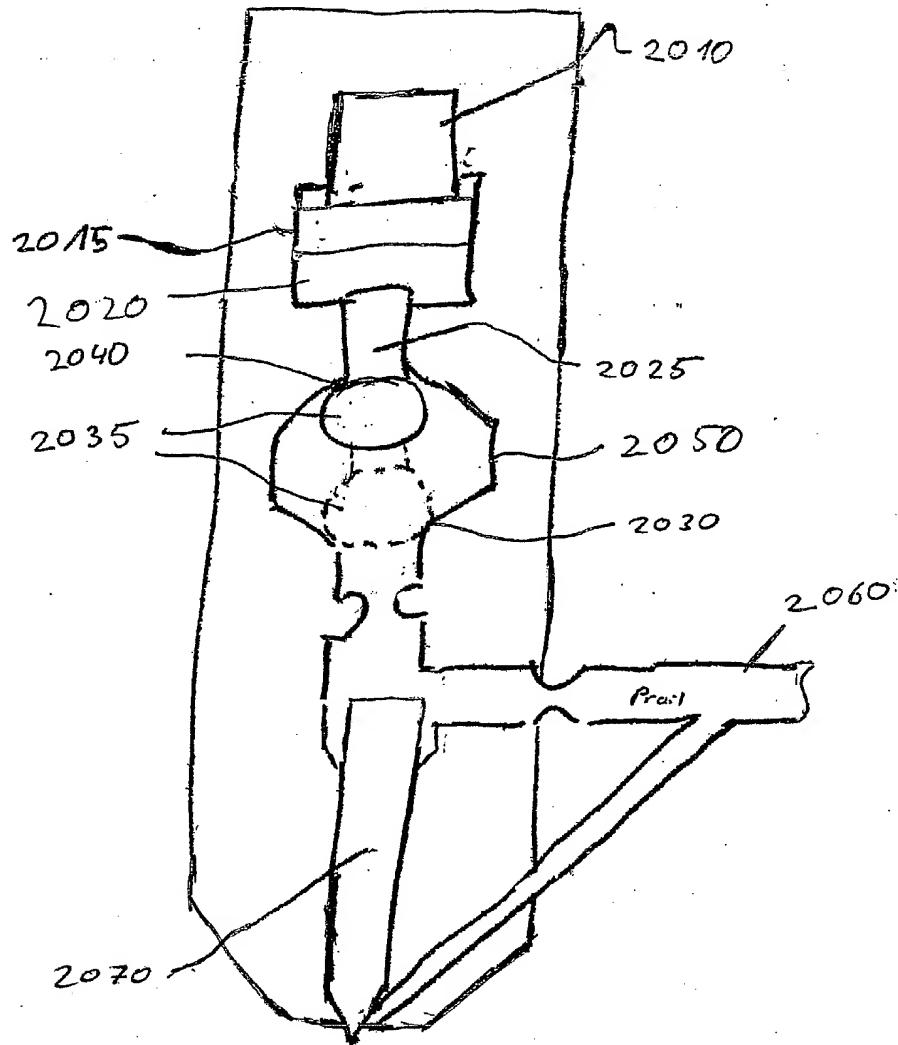


Fig. 15